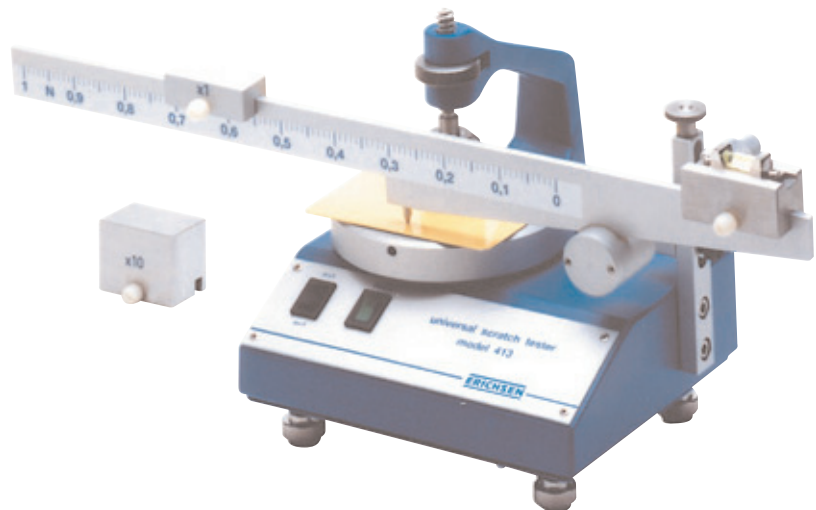




Scratch Tester Model 413

For various
hardness tests



testing equipment for quality management

ERICHSEN

**BOSCH
VAN LAAR
CLEMEN**

**ISO 4586-2
DIN EN 438-2**

Test principle

All test methods applicable for this instrument are in principle based on the same test procedure: The specimen is clamped on a turntable (number of revolutions of the standard version is 5 min^{-1}). The test tool is fixed on a load arm also equipped with an adjustable weight so that the pressure exerted onto the specimen material can be regulated.

The resistance of the specimen against this action is visually evaluated from the score mark (detailed information on the evaluation are given in the Operating Instructions).

Technical Data

Dimensions: (W x L x H) 220 x 450 x 210 mm
Weight (net): approx. 3.8 kg

Number of revolutions: 5 min^{-1} at 50 Hz or
 6 min^{-1} at 60 Hz
(please specify when ordering)

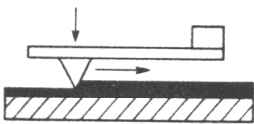


Power supply: 230 V/50-60 Hz or
110 V/50-60 Hz

Specimen size: max. 100 x 100 x 22 mm or
140 \varnothing x 22 mm

Order Information	
Ord.-No.	Product Description
0102.01.31	SCRATCH HARDNESS TESTER 413 - Basic instrument
The scope of supply includes:	
<ul style="list-style-type: none"> ◆ Load arm for fixing the test tool ◆ 2 weights for the load ranges 1 N and 10 N ◆ 1 counter weight with spirit level ◆ box level ◆ magnifying glass ◆ screw driver ◆ carrying case ◆ instructions manual 	

Accessories	
Ord.-No.	Product Description
0218.01.32	Diamond test tip (90° included angle, 90 μm radius on the point)
0218.02.32	Test tip acc. to Clemen
0539.02.32	Test tip acc. to Bosch (\varnothing 0.75 mm)
0539.03.32	Test tip technically equivalent to ISO 1518, BS 3900:E2 and DEF 1053 (\varnothing 1 mm)
0539.01.32	Test tip acc. to van Laar (\varnothing 0.5 mm)
0458.01.32	1 set of calibration panels acc. to ISO 4586-2 (5 each PMMA and HPDL panels)

In the following table the essential test parameters are indicated:

Sketch	Field of application	Method	Measuring Range/ Accuracy	Test Tool	Test Principle
	Decorative laminated sheets (HPL)	Micro scratch hardness acc. to specifications of the plastics industry - ISO 4586-2 DIN EN 438-2	0 - 10 \pm 0.1 N	Diamond test tip, angle 90°, radius on the point 90 μm Ord.-No. 0218.01.32	Advent of a visible score mark
	Paints and similar coating materials	Scratch hardness in acc. with - ISO 1518 - Bosch, Opel, van Laar	0 - 10 \pm 0.1 N	Test tip equivalent to ISO: 1 mm \varnothing Ord.-No. 0539.03.32 Test tip acc. to Bosch: 0.75 mm \varnothing Ord.-No.: 0539.02.32 Test tip acc. to van Laar: 0.5 mm \varnothing Ord.-No.:0539.01.32	Advent of a visible score mark
	Paints and similar coating materials	Scratch hardness acc. to Clemen	0 - 10 \pm 0.1 N	Test tip acc. to Clemen at 2° angle Ord.-No.: 0218.02.32	Advent of a visible score mark

Subject to technical modifications.
Gr. 14 - TBE 413 - I/2006

